



TE0803 StarterKit

Revision v.36

Exported on 2023-09-12

Online version of this document:

<https://wiki.trenz-electronic.de/display/PD/TE0803+StarterKit>

1 Table of Contents

1	Table of Contents.....	2
2	Table of Figures.....	4
3	Table of Tables	5
4	Overview.....	7
4.1	Key Features.....	7
4.2	Revision History	7
4.3	Release Notes and Known Issues	12
4.4	Requirements.....	13
4.4.1	Software	13
4.4.2	Hardware.....	14
4.5	Content.....	21
4.5.1	Design Sources.....	21
4.5.2	Additional Sources.....	22
4.5.3	Prebuilt.....	22
4.5.4	Download	23
5	Design Flow	24
6	Launch	26
6.1	Programming	26
6.1.1	Get prebuilt boot binaries	26
6.1.2	QSPI-Boot mode.....	26
6.1.3	SD-Boot mode	27
6.1.4	JTAG.....	27
6.2	Usage	27
6.2.1	Linux	27
6.2.2	Vivado Hardware Manager	28
7	System Design - Vivado.....	30
7.1	Block Design	30
7.1.1	PS Interfaces.....	30
7.2	Constraints.....	31
7.2.1	Basic module constraints.....	31
7.2.2	Design specific constraints	31
8	Software Design - Vitis	33
8.1	Application	33
8.1.1	zynqmp_fsbl.....	33
8.1.2	zynqmp_fsbl_flash.....	33
8.1.3	hello_te0803.....	33
8.1.4	u-boot	33
9	Software Design - PetaLinux.....	34
9.1	Config.....	34
9.2	U-Boot.....	34

9.3	Device Tree.....	35
9.4	FSBL patch.....	42
9.5	Kernel.....	42
9.6	Rootfs.....	43
9.7	Applications.....	43
9.7.1	startup	43
9.7.2	webfwu	43
10	Additional Software	44
10.1	SI5338	44
11	Appx. A: Change History and Legal Notices	45
11.1	Document Change History.....	45
11.2	Legal Notices	46
11.3	Data Privacy.....	46
11.4	Document Warranty.....	46
11.5	Limitation of Liability.....	47
11.6	Copyright Notice	47
11.7	Technology Licenses.....	47
11.8	Environmental Protection	47
11.9	REACH, RoHS and WEEE	47

2 Table of Figures

Figure 1: Block Design	30
------------------------------	----

3 Table of Tables

Table 1: Design Revision History	7
Table 2: Known Issues.....	12
Table 3: Software	13
Table 4: Hardware Modules.....	14
Table 5: Hardware Carrier.....	20
Table 6: Additional Hardware.....	20
Table 7: Design sources	21
Table 8: Additional design sources	22
Table 9: Prebuilt files (only on ZIP with prebuilt content)	22
Table 10: Vivado Hardware Manager	29
Table 11: PS Interfaces.....	30
Table 12: Document change history.	45

4 Overview

Linux with basic periphery of TE0808 StarterKit (TEBF0808 Carrier).

Refer to <http://trenz.org/te0803-info> for the current online version of this manual and other available documentation.

4.1 Key Features

- Vitis/Vivado 2021.2.1
- TEBF0808
- PetaLinux
- USB
- ETH
- MAC from EEPROM
- PCIe
- SATA
- SD
- I2C
- GPIO
- Display Port (DP)
- user LED access
- Modified FSBL for Si5338 programming/ petalinux patch

4.2 Revision History

Date	Vivado	Project Built	Authors	Description
2022-10-17	2021.2.1	TE0803-StarterKit-vivado_2021.2-build_18_20221017093105.zip TE0803-StarterKit_noprebuilt-vivado_2021.2-build_18_20221017093105.zip	Manuela Strücker	<ul style="list-style-type: none">• script update
2022-08-30	2021.2.1	TE0803-StarterKit-vivado_2021.2-build_15_20220830131524.zip TE0803-StarterKit_noprebuilt-vivado_2021.2-	Manuela Strücker	<ul style="list-style-type: none">• new assembly variants

Date	Vivado	Project Built	Authors	Description
		build_15_20220830131 524.zip		
2022-04-05	2021.2	TE0803-StarterKit- vivado_2021.2- build_11_20220405095 407.zip TE0803- StarterKit_noprebuilt- vivado_2021.2- build_11_20220405095 407.zip	Manuela Strücker	<ul style="list-style-type: none"> • 2021.2 update
2021-09-06	2020.2	TE0803- StarterKit_noprebuilt- vivado_2020.2- build_7_202109061046 31.zip TE0803-StarterKit- vivado_2020.2- build_7_202109061046 17.zip	Manuela Strücker	<ul style="list-style-type: none"> • 2020.2 update
2020-04-06	2019.2	TE0803- StarterKit_noprebuilt- vivado_2019.2- build_9_202004060824 58.zip TE0803-StarterKit- vivado_2019.2- build_9_202004060823 21.zip	John Hartfiel	<ul style="list-style-type: none"> • new assembly variants
2020-03-25	2019.2	TE0803- StarterKit_noprebuilt- vivado_2019.2- build_8_202003250825 16.zip TE0803-StarterKit- vivado_2019.2- build_8_202003250824 50.zip	John Hartfiel	<ul style="list-style-type: none"> • script update

Date	Vivado	Project Built	Authors	Description
2020-01-23	2019.2	TE0803-StarterKit_noprebuilt-vivado_2019.2-build_3_20200123065955.zip TE0803-StarterKit-vivado_2019.2-build_3_20200123065933.zip	John Hartfiel	<ul style="list-style-type: none"> • 2019.2 update • Vitis support • FSBL SI programming procedure update • petalinux device tree and u-boot update
2019-05-07	2018.3	TE0803-StarterKit-vivado_2018.3-build_05_20190507093424.zip TE0803-StarterKit_noprebuilt-vivado_2018.3-build_05_20190507093443.zip	John Hartfiel	<ul style="list-style-type: none"> • new assembly variant • TE Script update • rework of the FSBLs • SI5338 CLKBuilder Pro Project • some additional Linux features • MAC from EEPROM • new assembly variants • remove special compiler flags, which was needed in 2018.2
2018-10-25	2018.2	TE0803-Starterkit-vivado_2018.2-build_03_20181026141553.zip TE0803-Starterkit_noprebuilt-vivado_2018.2-build_03_20181026141611.zip	John Hartfiel	<ul style="list-style-type: none"> • new assembly variant
2018-08-14	2018.2	TE0803-Starterkit-vivado_2018.2-build_02_20180814103204.zip TE0803-Starterkit_noprebuilt-vivado_2018.2-build_02_20180814103221.zip	John Hartfiel	<ul style="list-style-type: none"> • new assembly variant

Date	Vivado	Project Built	Authors	Description
2018-07-23	2018.2	TE0803-Starterkit-vivado_2018.2-build_02_20180723204618.zip TE0803-Starterkit_noprebuilt-vivado_2018.2-build_02_20180723204638.zip	John Hartfiel	<ul style="list-style-type: none"> • correction on FSBL
2018-07-12	2018.2	TE0803-Starterkit_noprebuilt-vivado_2018.2-build_02_20180713085800.zip TE0803-Starterkit-vivado_2018.2-build_02_20180713085740.zip	John Hartfiel	<ul style="list-style-type: none"> • small petalinux changes • IO renaming • PL Design changes • additional notes for FSBL generated with Win SDK • changed *.bif
2018-05-17	2017.4	TE0803-Starterkit_noprebuilt-vivado_2017.4-build_09_20180517141540.zip TE0803-Starterkit-vivado_2017.4-build_09_20180517141523.zip	John Hartfiel	<ul style="list-style-type: none"> • new assembly variant • solved Linux flash issue
2018-04-11	2017.4	TE0803-Starterkit_noprebuilt-vivado_2017.4-build_07_20180411082139.zip TE0803-Starterkit-vivado_2017.4-build_07_20180411082116.zip	John Hartfiel	<ul style="list-style-type: none"> • bugfix TE0803-01-04EG board part file
2018-02-13	2017.4	TE0803-Starterkit_noprebuilt-vivado_2017.4-	John Hartfiel	<ul style="list-style-type: none"> • new assembly variant

Date	Vivado	Project Built	Authors	Description
		build_06_20180213120 642.zip TE0803-Starterkit- vivado_2017.4- build_06_20180213120 615.zip		
2018-02-06	2017.4	TE0803- Starterkit_noprebuilt- vivado_2017.4- build_05_20180206082 527.zip TE0803-Starterkit- vivado_2017.4- build_05_20180206082 513.zip	John Hartfiel	<ul style="list-style-type: none"> • same CLK for both VIO
2018-02-05	2017.4	TE0803- Starterkit_noprebuilt- vivado_2017.4- build_05_20180205154 248.zip TE0803-Starterkit- vivado_2017.4- build_05_20180205154 230.zip	John Hartfiel	<ul style="list-style-type: none"> • new assembly variant • solved JTAG/Linux issue
2018-01-31	2017.4	TE0803-Starterkit- vivado_2017.4- build_05_20180131124 042.zip TE0803- Starterkit_noprebuilt- vivado_2017.4- build_05_20180131124 057.zip	John Hartfiel	<ul style="list-style-type: none"> • new assembly variant
2018-01-18	2017.4	TE0803-Starterkit- vivado_2017.4- build_05_20180118164 553.zip TE0803- Starterkit_noprebuilt-	John Hartfiel	<ul style="list-style-type: none"> • initial release

Date	Vivado	Project Built	Authors	Description
		vivado_2017.4-build_05_20180118164613.zip		

Table 1: Design Revision History

4.3 Release Notes and Known Issues

Issues	Description	Workaround/Solution	To be fixed version
Xilinx Software	Incompatibility of board files for ZynqMP with eMMC activated between 2021.2 and 2021.2.1 patch, see Xilinx Forum Request ¹	use corresponding board files for the Vivado versions	--
MAC from EEPROM	The MAC address stored in the EEPROM is not read out and initialised correctly during start-up. This is caused by two I2C expanders each switched to the same EEPROM with the same address i2cswitch@73 --> i2c@5 --> reg = <0x50> and i2cswitch@77 --> i2c@4 --> reg = <0x50>	Switching the second I2C expander (i2cswitch@77) to another channel in the fsbl solves the error during the start-up procedure.	Solved with 20220405 update
QSPI Flash	Flash programming is not supported with boot mode QSPI or SD.	If flash programming fails, configure device for JTAG boot mode and try again or use older Vivado Versions for programming. (Vivado 2020.2 or	--

¹ https://support.xilinx.com/s/feed/0D54U00005Wbon6SAB?language=en_US

Issues	Description	Workaround/Solution	To be fixed version
		2019.2)	
Flash access on Linux	Device tree is not correct on Linux	add compatibility to "compatible "jedec,spi-nor""	Solved with 201805 17 update
USB UART Terminal is blocked / SDK Debugging is blocked	This happens only with 2017.4 Linux , when JTAG connection is established on Vivado HW Manager.	Do not use HW Manager connection, or if debugging is necessary: 1. Boot linux with usb terminal 2. From the terminal: root root mount ifconfig eth0 3. Open two new SSH terminals via ethernet: root root , run user application ... 4. Exit and close the usb terminal	Solved with 201802 05 update

Table 2: Known Issues

4.4 Requirements

4.4.1 Software

Software	Version	Note
Vitis	2021.2	needed, Vivado is included into Vitis installation
PetaLinux	2021.2	needed
SI ClockBuilder Pro	---	optional

Table 3: Software

4.4.2 Hardware

Basic description of TE Board Part Files is available on [TE Board Part Files](#).²
Complete List is available on "<project folder>\board_files*_board_files.csv"

Design supports following modules:

Module Model	Board Part Short Name	PCB Revision Support	D D R	QSPI Flash	EM MC	Others	Notes
TE0803-01 -02EG-1E	2eg_2gb	REV01	2G B	64MB	NA	NA	NA
TE0803-01 -02CG-1E	2cg_2gb	REV01	2G B	64MB	NA	NA	NA
TE0803-01 -03EG-1E	3eg_2gb	REV01	2G B	64MB	NA	NA	NA
TE0803-01 -03CG-1E	3cg_2gb	REV01	2G B	64MB	NA	NA	NA
TE0803-01 -02EG-1EA	2eg_2gb	REV01	2G B	128MB	NA	NA	NA
TE0803-01 -02CG-1EA	2cg_2gb	REV01	2G B	128MB	NA	NA	NA
TE0803-01 -03EG-1EA	3eg_2gb	REV01	2G B	128MB	NA	NA	NA
TE0803-01 -03CG-1EA	3cg_2gb	REV01	2G B	128MB	NA	NA	NA
TE0803-02 -03EG-1EB	3eg_4gb	REV02 REV01	4G B	128MB	NA	NA	NA
TE0803-01 -04CG-1EA	4cg_2gb	REV01	2G B	128MB	NA	NA	NA

² <https://wiki.trenz-electronic.de/display/PD/TE+Board+Part+Files>

Module Model	Board Part Short Name	PCB Revision Support	D D R	QSPI Flash	EM MC	Others	Notes
TE0803-02 -04EV-1EA	4ev_2gb	REV02 REV01	2G B	128MB	NA	NA	NA
TE0803-01 -04EV-1E3	4ev_2gb	REV01	2G B	128MB	NA	1 mm connectors	NA
TE0803-01 -04EG-1EA	4eg_2gb	REV01	2G B	128MB	NA	NA	NA
TE0803-01 -04CG-1EB	4cg_2gb	REV01	2G B	256MB	NA	NA	NA
TE0803-01 -05EV-1EA	5ev_2gb	REV01	2G B	128MB	NA	NA	NA
TE0803-01 -05EV-1IA	5ev_i_2gb	REV01	2G B	128MB	NA	NA	NA
TE0803-02 -04EV-1E3	4ev_4gb	REV02	4G B	128MB	NA	1 mm connectors	NA
TE0803-02 -04EG-1E3	4eg_4gb	REV02	4G B	128MB	NA	1 mm connectors	NA
TE0803-03 -2AE11-A	2cg_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -2BE11-A	2eg_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -3AE11-A	3cg_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -3BE11-A	3eg_2gb	REV03	2G B	128MB	NA	NA	NA

Module Model	Board Part Short Name	PCB Revision Support	D DR	QSPI Flash	EM MC	Others	Notes
TE0803-03 -4AE11-A	4cg_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -4BE11-A	4eg_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -4BE21-L	4eg_4gb	REV03	4G B	128MB	NA	1 mm connectors	NA
TE0803-03 -4BI21-A	4eg_i_4gb	REV03	4G B	128MB	NA	NA	NA
TE0803-03 -4DE11-A	4ev_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -4DE21-L	4ev_4gb	REV03	4G B	128MB	NA	1 mm connectors	NA
TE0803-03 -4GE21-L	4eg_2_4gb	REV03	4G B	128MB	NA	1 mm connectors	NA
TE0803-03 -5DE11-A	5ev_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -5DI21-A	5ev_i_4gb	REV03	4G B	128MB	NA	NA	NA
TE0803-03 -3RI21-A	3eg_li_4gb	REV03	4G B	128MB	NA	NA	NA
TE0803-03 -3BI21-A	3eg_i_4gb	REV03	4G B	128MB	NA	NA	NA

Module Model	Board Part Short Name	PCB Revision Support	D DR	QSPI Flash	EM MC	Others	Notes
TE0803-03 -4DI21-L	4ev_i_4gb	REV03	4G B	128MB	NA	1 mm connectors	NA
TE0803-03 -4GI11-A	4eg_2i_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -4GE11-A	4eg_2_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -4GI21-A	4eg_2i_4gb	REV03	4G B	128MB	NA	NA	NA
TE0803-03 -5BE11-A	5eg_2gb	REV03	2G B	128MB	NA	NA	NA
TE0803-03 -5DI24-A	5ev_i_4gb	REV03	4G B	512MB	NA	NA	NA
TE0803-03 -4BI21-X	4eg_i_4gb	REV03	4G B	128MB	NA	NA	U41 replaced with diode
TE0803-03 -3BE21-A	3eg_4gb	REV03	4G B	128MB	NA	NA	NA
TE0803-03 -3BE31-A*	3eg_8gb	REV03	8G B	128MB	NA	NA	dual die ddr
TE0803-04 -2AE11-A	2cg_2gb	REV04	2G B	128MB	NA	NA	NA
TE0803-04 -2BE11-A	2eg_2gb	REV04	2G B	128MB	NA	NA	NA
TE0803-04 -3AE11-A	3cg_2gb	REV04	2G B	128MB	NA	NA	NA

Module Model	Board Part Short Name	PCB Revision Support	D DR	QSPI Flash	EM MC	Others	Notes
TE0803-04 -3BE11-A	3eg_2gb	REV04	2G B	128MB	NA	NA	NA
TE0803-04 -4BE21-L	4eg_4gb	REV04	4G B	128MB	NA	1 mm connectors	NA
TE0803-04 -4BI21-A	4eg_i_4gb	REV04	4G B	128MB	NA	NA	NA
TE0803-04 -4BI21-X	4eg_i_4gb	REV04	4G B	128MB	NA	NA	U41 replaced with diode
TE0803-03 -4BI61-A	4eg_8gb	REV03	8G B	128MB	NA	NA	dual die ddr
TE0803-03 -4BI61-X	4eg_8gb	REV03	8G B	128MB	NA	NA	dual die ddr
TE0803-04 -4BI61-A	4eg_8gb	REV04	8G B	128MB	NA	NA	dual die ddr
TE0803-04 -4BI61-X	4eg_8gb	REV04	8G B	128MB	NA	NA	dual die ddr
TE0803-04 -4DE11-A	4ev_2gb	REV04	2G B	128MB	NA	NA	NA
TE0803-04 -4DE21-L	4ev_4gb	REV04	4G B	128MB	NA	1 mm connectors	NA
TE0803-04 -4DI21-L	4ev_i_4gb	REV04	4G B	128MB	NA	1 mm connectors	NA

Module Model	Board Part Short Name	PCB Revision Support	D D R	QSPI Flash	EM MC	Others	Notes
TE0803-03 -4DI21-D	4ev_i_4gb	REV03	4G B	128MB	NA		NA
TE0803-04 -4DI21-D	4ev_i_4gb	REV04	4G B	128MB	NA		NA
TE0803-04 -4GE21-L	4eg_2_4gb	REV04	4G B	128MB	NA	1 mm connectors	NA
TE0803-04 -4GI21-A	4eg_2i_4gb	REV04	4G B	128MB	NA	NA	NA
TE0803-04 -5BE11-A	5eg_2gb	REV04	2G B	128MB	NA	NA	NA
TE0803-04 -5DE11-A	5ev_2gb	REV04	2G B	128MB	NA	NA	NA
TE0803-04 -5DI21-A	5ev_i_4gb	REV04	4G B	128MB	NA	NA	NA
TE0803-03 -S003	4ev_2gb	REV04	2G B	128MB	NA	NA	CAO
TE0803-03 -S006	4ev_4gb	REV04	4G B	128MB	NA	1 mm connectors	CAO
TE0803-04 -4BE11-A	4eg_2gb	REV04	2G B	128MB	NA	NA	CAO
TE0803-03 -S005	4eg_2gb	REV03	2G B	128MB	NA	NA	CAO: TE0803-03-4BI1?-A

Module Model	Board Part Short Name	PCB Revision Support	D DR	QSPI Flash	EM MC	Others	Notes
TE0803-04-S009	4eg_2_4gb	REV04	4G B	128MB	NA	1 mm connectors	CAO: TE0803-04-4 GE21-L
TE0803-04-S011	4eg_2_4gb	REV04	4G B	64MB	NA	1 mm connectors	CAO: TE0803-04-4 GE25-L
TE0803-04-4AE11-A	4cg_2gb	REV04	2G B	128MB	NA	NA	NA
TE0803-04-S012	2cg_2gb	REV04	2G B	128MB	NA	NA	CAO

Table 4: Hardware Modules

* used as reference

Note: Design contains also Board Part Files for TE0803 only configuration, this board part files are not used for this reference design.

Design supports following carriers:

Carrier Model	Notes
TEBF0808*	Used as reference carrier. Important: CPLD Firmware REV07 or newer is recommended

Table 5: Hardware Carrier

* used as reference

Additional HW Requirements:

Additional Hardware	Notes
DP Monitor	Optional HW Not all monitors are supported, also Adapter to other Standard can make trouble. Design was tested with DELL P2421

Additional Hardware	Notes
USB Keyboard	Optional HW Can be used to get access to console which is shown on DP
USB Stick	Optional HW USB was tested with USB memory stick
SATA Disk	Optional HW
PCIe Card	Optional HW
ETH cable	Optional HW Ethernet works with DHCP, but can be setup also manually
SD card	with fat32 partition

Table 6: Additional Hardware

4.5 Content

For general structure and usage of the reference design, see [Project Delivery - AMD devices](#)³

4.5.1 Design Sources

Type	Location	Notes
Vivado	<project folder>\block_design <project folder>\constraints <project folder>\ip_lib <project folder>\board_files	Vivado Project will be generated by TE Scripts
Vitis	<project folder>\sw_lib	Additional Software Template for Vitis and apps_list.csv with settings automatically for Vitis app generation

³ <https://wiki.trenz-electronic.de/display/PD/Project+Delivery+-+AMD+devices>

Type	Location	Notes
PetaLinux	<project folder>\os\petalinux	PetaLinux template with current configuration

Table 7: Design sources

4.5.2 Additional Sources

Type	Location	Notes
SI5338	<project folder>\misc\PLL\Si5338_B	SI5338 Project with current PLL Configuration
init.sh	<project folder>\misc\sd	Additional Initialization Script for Linux

Table 8: Additional design sources

4.5.3 Prebuilt

File	File-Extension	Description
BIF-File	*.bif	File with description to generate Bin-File
BIN-File	*.bin	Flash Configuration File with Boot-Image (Zynq-FPGAs)
BIT-File	*.bit	FPGA (PL Part) Configuration File
Boot Script-File	*.scr	Distro Boot Script file
DebugProbes-File	*.ltx	Definition File for Vivado/Vivado Labtools Debugging Interface
Diverse Reports	---	Report files in different formats

File	File-Extension	Description
Hardware-Platform- Description-File	*.xsa	Exported Vivado hardware description file for Vitis and PetaLinux
LabTools Project-File	*.lpr	Vivado Labtools Project File
OS-Image	*.ub	Image with Linux Kernel (On Petalinux optional with Devicetree and RAM-Disk)
Software-Application-File	*.elf	Software Application for Zynq or MicroBlaze Processor Systems

Table 9: Prebuilt files (only on ZIP with prebuilt content)

4.5.4 Download

Reference Design is only usable with the specified Vivado/Vitis/PetaLinux version. Do never use different Versions of Xilinx Software for the same Project.

Reference Design is available on:

- [TE0803 "StarterKit" Reference Design⁴](https://shop.trenz-electronic.de/Download/?path=Trenz_Electronic/Modules_and_Module_Carriers/5.2x7.6/TE0803/Reference_Design/2021.2/StarterKit)

⁴ https://shop.trenz-electronic.de/Download/?path=Trenz_Electronic/Modules_and_Module_Carriers/5.2x7.6/TE0803/Reference_Design/2021.2/StarterKit

5 Design Flow

⚠ Reference Design is available with and without prebuilt files. It's recommended to use TE prebuilt files for first launch.

Trenz Electronic provides a tcl based built environment based on Xilinx Design Flow.

See also:

- [AMD Development Tools⁵](#)
- [Vivado Projects - TE Reference Design⁶](#)
- [Project Delivery.⁷](#)

The Trenz Electronic FPGA Reference Designs are TCL-script based project. Command files for execution will be generated with "_create_win_setup.cmd" on Windows OS and "_create_linux_setup.sh" on Linux OS.

TE Scripts are only needed to generate the vivado project, all other additional steps are optional and can also be executed by Xilinx Vivado/Vitis GUI. For currently Scripts limitations on Win and Linux OS see: [Project Delivery Currently limitations of functionality⁸](#)

⚠ Caution! Win OS has a 260 character limit for path lengths which can affect the Vivado tools. To avoid this issue, use Virtual Drive or the shortest possible names and directory locations for the reference design (for example "x:\<project folder>")

1. Run _create_win_setup.cmd/_create_linux_setup.sh and follow instructions on shell:

_create_win_setup.cmd/_create_linux_setup.sh

```
-----Set design paths-----
-- Run Design with: _create_win_setup
-- Use Design Path: <absolute project path>
-----
-----TE Reference Design-----
-----
-- (0) Module selection guide, project creation...prebuilt export...
-- (1) Create minimum setup of CMD-Files and exit Batch
-- (2) Create maximum setup of CMD-Files and exit Batch
-- (3) (internal only) Dev
-- (4) (internal only) Prod
-- (c) Go to CMD-File Generation (Manual setup)
-- (d) Go to Documentation (Web Documentation)
-- (g) Install Board Files from Xilinx Board Store (beta)
-- (a) Start design with unsupported Vivado Version (beta)
-- (x) Exit Batch (nothing is done!)
-----
Select (ex.: '0' for module selection guide)
```

2. Press 0 and enter to start "Module Selection Guide"
3. Create project and follow instructions of the product selection guide, settings file will be configured automatically during this process.

5 <https://wiki.trenz-electronic.de/display/PD/AMD+Development+Tools#AMDDevelopmentTools-XilinxSoftware-BasicUserGuides>

6 <https://wiki.trenz-electronic.de/display/PD/Vivado+Projects+-+TE+Reference+Design>

7 <https://wiki.trenz-electronic.de/display/PD/Project+Delivery+-+AMD+devices>

8 <https://wiki.trenz-electronic.de/display/PD/Project+Delivery+-+AMD+devices#ProjectDeliveryAMDdevices-Currentlylimitationsoffunctionality>

- optional for manual changes: Select correct device and Xilinx install path on "design_basic_settings.cmd" and create Vivado project with "vivado_create_project_guimode.cmd"

⚠ Note: Select correct one, see also [Vivado Board Part Flow](#)⁹

- **Important:** Use Board Part Files, which ends with *_tebf0808

4. Create hardware description file (.xsa file) for PetaLinux project and export to prebuilt folder

run on Vivado TCL (Script generates design and export files into "\prebuilt\hardware\")

```
\prebuilt\hardware\"")
TE::hw_build_design -export_prebuilt
```

ⓘ Using Vivado GUI is the same, except file export to prebuilt folder.

5. Create and configure your PetaLinux project with exported .xsa-file, see [PetaLinux KICKstart](#)¹⁰
 - use TE Template from "<project folder>\os\petalinux"
 - use exported .xsa file from "<project folder>\prebuilt\hardware\<short name>". **Note:** HW Export from Vivado GUI creates another path as default workspace.
 - The build images are located in the "<plnx-proj-root>/images/linux" directory
6. Configure the **boot.scr** file as needed, see [Distro Boot with Boot.scr](#)¹¹
7. Copy PetaLinux build image files to prebuilt folder
 - copy **u-boot.elf**, **u-boot.dtb**, **system.dtb**, **bl31.elf**, **image.ub** and **boot.scr** from "<plnx-proj-root>/images/linux" to prebuilt folder

ⓘ "<project folder>\prebuilt\os\petalinux\<ddr size>" or "<project folder>\prebuilt\os\petalinux\<short name>"

8. Generate Programming Files with Vitis

run on Vivado TCL (Script generates applications and bootable files, which are defined in "test_board\sw_lib\apps_list.csv")

```
TE::sw_run_vitis -all
TE::sw_run_vitis (optional; Start Vitis from Vivado GUI or start with TE Scripts on Vivado TCL)
```

⚠ TCL scripts generate also platform project, this must be done manually in case GUI is used. See [Vitis](#)¹²

⁹ <https://wiki.trenz-electronic.de/display/PD/Vivado+Board+Part+Flow>

¹⁰ <https://wiki.trenz-electronic.de/display/PD/PetaLinux+KICKstart>

¹¹ <https://wiki.trenz-electronic.de/display/PD/Distro+Boot+with+Boot.scr>

¹² <https://wiki.trenz-electronic.de/display/PD/Vitis>

6 Launch

6.1 Programming

⚠ Check Module and Carrier TRMs for proper HW configuration before you try any design. Reference Design is also available with prebuilt files. It's recommended to use TE prebuilt files for first launch.

Xilinx documentation for programming and debugging: [Vivado/Vitis/SDSoC-Xilinx Software Programming and Debugging¹³](#)

6.1.1 Get prebuilt boot binaries

1. Run _create_win_setup.cmd/_create_linux_setup.sh and follow instructions on shell
2. Press 0 and enter to start "Module Selection Guide"
 - a. Select assembly version
 - b. Validate selection
 - c. Select create and open delivery binary folder

i Note: Folder "<project folder>_binaries_<Article Name>" with subfolder "boot_<app name>" for different applications will be generated

6.1.2 QSPI-Boot mode

Option for **Boot.bin** on QSPI Flash.

1. Connect **JTAG** and power on carrier with module
2. Open Vivado Project with "vivado_open_existing_project_guimode.cmd" or if not created, create with "vivado_create_project_guimode.cmd"

run on Vivado TCL (Script programs BOOT.bin on QSPI flash)

```
TE::pr_program_flash -swapp hello_te0803
```

3. Copy **image.ub** and **boot.scr** on **SD** or **USB**
 - use files from "<project folder>_binaries_<Article Name>\boot_linux" from generated binary folder, see: [Get prebuilt boot binaries \(see page 26\)](#)
 - or use prebuilt file location, see "<project folder>\prebuilt\file_location.txt"
4. Set Boot Mode to **QSPI-Boot**
 - Depends on Carrier, see carrier TRM.
 - TEBF0808 automatically changes the boot mode to SD when the SD card is inserted. Optional CPLD firmware without boot mode change for microSD slot is available in the download area

¹³ <https://wiki.trenz-electronic.de/display/PD/AMD+Development+Tools#AMDDevelopmentTools-XilinxSoftwareProgrammingandDebugging>

6.1.3 SD-Boot mode

1. Copy **image.ub**, **boot.src** and **Boot.bin** on **SD**
 - use files from "<project folder>_binaries_<Article Name>\boot_linux" from generated binary folder, see: [Get prebuilt boot binaries\(see page 26\)](#)
 - or use prebuilt file location, see "<project folder>\prebuilt\file_location.txt"
2. Set Boot Mode to SD-Boot.
 - Depends on Carrier, see carrier TRM.
3. Insert SD-Card in SD-Slot.

6.1.4 JTAG

Not used on this Example.

6.2 Usage

1. Prepare HW like described on section [Programming\(see page 26\)](#)
2. Connect UART USB (JTAG XMOD)
3. Select SD Card as Boot Mode (or QSPI - depending on step 1)

 Note: See TRM of the Carrier, which is used.

 Starting with Petalinux version 2020.1, the industry standard "Distro-Boot" boot flow for U-Boot was introduced, which significantly expands the possibilities of the boot process and has the primary goal of making booting much more standardised and predictable.

The boot options described above describe the common boot processes for this hardware; other boot options are possible.

For more information see [Distro Boot with Boot.scr¹⁴](#)

4. (Optional with TEBF0808) Insert PCIe Card (detection depends on Linux driver. Only some basic drivers are installed)
5. (Optional with TEBF0808) Connect SATA Disc
6. (Optional with TEBF0808) Connect DisplayPort Monitor (List of usable Monitors: <https://www.xilinx.com/support/answers/68671.html>)
7. (Optional with TEBF0808) Connect Network Cable
8. Power On PCB
boot process
 1. ZynqMP Boot ROM loads FSBL from SD/QSPI into OCM,
 2. FSBL init the PS, programs the PL using the bitstream and loads PMU, ATF and U-boot from SD/QSPI into DDR,
 3. U-boot loads Linux (**image.ub**) from SD/QSPI/... into DDR

6.2.1 Linux

1. Open Serial Console (e.g. putty)
 - Speed: 115200

¹⁴ <https://wiki.trenz-electronic.de/display/PD/Distro+Boot+with+Boot.scr>

- select COM Port

i Win OS, see device manager, Linux OS see dmesg |grep tty (UART is *USB1)

2. Linux Console:

```
# password default disabled with 2021.2 petalinux release
petalinux login: root
Password: root
```

i Note: Wait until Linux boot finished

3. You can use Linux shell now.

```
i2cdetect -y -r 0    (check I2C Bus, replace 0 with other bus number is also
possible)
dmesg | grep rtc      (RTC check)
udhcpc                 (ETH0 check)
lsusb                  (USB check)
lspci                  (PCIe check)
```

4. Option Features

- Webserver to get access to Zynq
 - insert IP on web browser to start web interface
- init.sh scripts
 - add init.sh script on SD, content will be load automatically on startup (template included in "<project folder>\misc\SD")

6.2.2 Vivado Hardware Manager

Open Vivado HW-Manager and add VIO signal to dashboard (*.ltx located on prebuilt folder).

- GPIO Interface (**Important:** CPLD Firmware REV07 or newer is needed) for Control and Monitoring:
 - Set Enable to send Write date over GPIO interface.
 - **Important use CPLD Firmware REV07 or newer:** <https://wiki.trenz-electronic.de/display/PD/TEBF0808+CPLD>
 - Buttons, LEDs, Status...
- Control:
 - LEDs: XMOD 2 (without green dot) and HD LED are accessible.
 - CAN_S

The screenshot shows two tabs in the Vivado Hardware Manager: **hw_vio_1** and **hw_vio_2**. Both tabs have a table with columns: Name, Value, Acti..., Directi..., and VIO.

hw_vio_1 Data:

Name	Value	Acti...	Directi...	VIO
zusys_iRGPIOMo_gpio_s_enable	[B] 1		Output	hw_vio_1
zusys_iRGPIOMo_gpio_s_23dt12_PG[11:0]	[H] FFF		Input	hw_vio_1
zusys_iRGPIOMo_gpio_s_23dt8_unused[15:0]	[H] 0000		Output	hw_vio_1
zusys_iRGPIOMo_gpio_s_11dt8_bootmode[3:0]	[H] 5		Input	hw_vio_1
zusys_iRGPIOMo_gpio_s_7dt6_ER_ERST[1:0]	[H] 0		Input	hw_vio_1
zusys_iRGPIOMo_gpio_s_7dt0_data[7:0]	[H] 1F		Output	hw_vio_1
zusys_iRGPIOMo_gpio_s_6dt5_SD_CD[1:0]	[H] 1		Input	hw_vio_1
zusys_iRGPIOMo_gpio_s_3_unused	[B] 1		Input	hw_vio_1
zusys_iRGPIOMo_gpio_s_2_xmod1_button	[B] 1		Input	hw_vio_1
zusys_iRGPIOMo_gpio_s_1_55_2_bootmode	[B] 0		Input	hw_vio_1
zusys_iRGPIOMo_gpio_s_0_S5_1_bootmode	[B] 0		Input	hw_vio_1
zusys_iRGPIOMo_gpio_s_enable	[B] 1		Output	hw_vio_1
zusys_iRGPIOMo_gpio_m_23dt12_unused[11:0]	[H] 000		Output	hw_vio_1
zusys_iRGPIOMo_gpio_m_23_PTAG_SRST	[B] 1		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_22_PTAG_TRST	[B] 1		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_21_FMC_CLKDIR	[B] 0		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_20_SD_WP	[B] 0		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_19_reserved	[B] 0		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_18_S5_4_FMCAJAD	[B] 1		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_17_S5_3_USER	[B] 1		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_16_XMOD2BUTTON	[B] 1		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_15dt13_PHY_LED[2:0]	[H] 7		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_12_CAN_FAULT	[B] 0		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_11dt8_muxsel[3:0]	[H] 0		Output	hw_vio_1
zusys_iRGPIOMo_gpio_m_11dt8_MUX[3:0]	[H] 0		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_7dt6_unused[1:0]	[H] 0		Output	hw_vio_1
zusys_iRGPIOMo_gpio_m_7dt0_data[7:0]	[H] 1F		Input	hw_vio_1
zusys_iRGPIOMo_gpio_m_5dt0_leds[5:0]	[H] 00		Output	hw_vio_1

hw_vio_2 Data:

Name	Value	Acti...	Directi...	VIO
zusys_iMo_CAN_0_S	[B] 0		Output	hw_vio_2
zusys_iMo_LED_HD	[B] 0		Output	hw_vio_2
zusys_iMo_LED_XMOD2	[B] 0		Output	hw_vio_2

Table 10: Vivado Hardware Manager

7 System Design - Vivado

7.1 Block Design

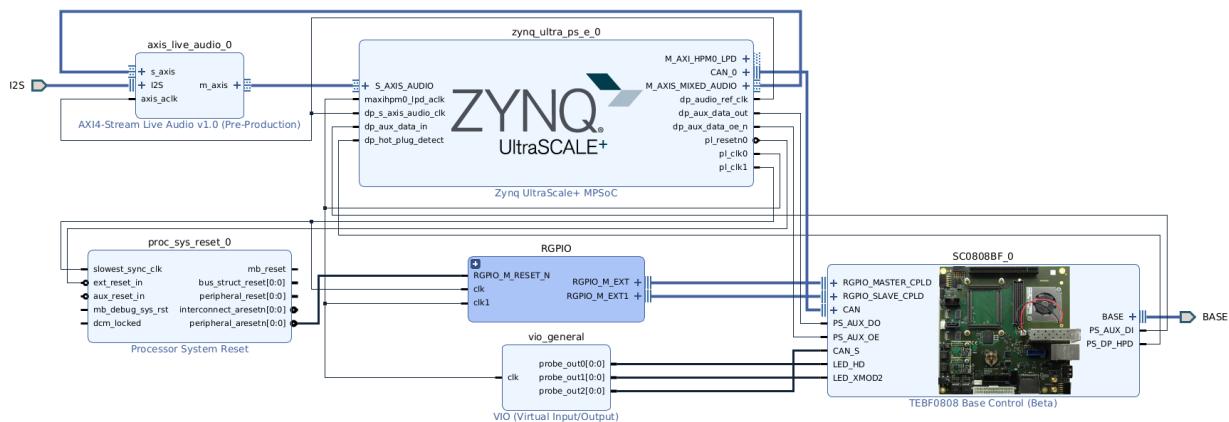


Figure 1: Block Design

7.1.1 PS Interfaces

Activated interfaces:

Type	Note
DDR	
QSPI	MIO
SD0	MIO
SD1	MIO
CAN0	EMIO
I2C0	MIO
PJTAG0	MIO

Type	Note
UART0	MIO
GPIO0	MIO
SWDT0..1	
TTC0..3	
GEM3	MIO
USB0	MIO/GTP
PCIe	MIO/GTP
SATA	GTP
DisplayPort	EMIO/GTP

Table 11: PS Interfaces

7.2 Constraints

7.2.1 Basic module constrains

_i_bitgen.xdc

```
set_property BITSTREAM.GENERAL.COMPRESS TRUE [current_design]
set_property BITSTREAM.CONFIG.UNUSEDPIN PULLNONE [current_design]
```

7.2.2 Design specific constrain

_i_io.xdc

```
# system controller ip
#LED_HD SC0 J3:31
#LED_XMOD SC17 J3:48
#CAN RX SC19 J3:52 B26_L11_P
#CAN TX SC18 J3:50 B26_L11_N
```

```
#CAN S SC16 J3:46 B26_L1_N
```

```
set_property PACKAGE_PIN G14 [get_ports BASE_sc0]
set_property PACKAGE_PIN D15 [get_ports BASE_sc5]
set_property PACKAGE_PIN H13 [get_ports BASE_sc6]
set_property PACKAGE_PIN H14 [get_ports BASE_sc7]
set_property PACKAGE_PIN A13 [get_ports BASE_sc10_io]
set_property PACKAGE_PIN B13 [get_ports BASE_sc11]
set_property PACKAGE_PIN A14 [get_ports BASE_sc12]
set_property PACKAGE_PIN B14 [get_ports BASE_sc13]
set_property PACKAGE_PIN F13 [get_ports BASE_sc14]
set_property PACKAGE_PIN G13 [get_ports BASE_sc15]
set_property PACKAGE_PIN A15 [get_ports BASE_sc16]
set_property PACKAGE_PIN B15 [get_ports BASE_sc17]
set_property PACKAGE_PIN J14 [get_ports BASE_sc18]
set_property PACKAGE_PIN K14 [get_ports BASE_sc19 ]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc0]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc5]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc6]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc7]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc10_io]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc11]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc12]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc13]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc14]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc15]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc16]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc17]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc18]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc19]
```

```
# Audio Codec
```

```
#LRCLK      J3:49
#BCLK       J3:51
#DAC_SDATA  J3:53
#ADC_SDATA  J3:55
set_property PACKAGE_PIN L13 [get_ports I2S_lrclk ]
set_property PACKAGE_PIN L14 [get_ports I2S_bclk ]
set_property PACKAGE_PIN E15 [get_ports I2S_sdin ]
set_property PACKAGE_PIN F15 [get_ports I2S_sdout ]
set_property IOSTANDARD LVCMOS18 [get_ports I2S_lrclk ]
set_property IOSTANDARD LVCMOS18 [get_ports I2S_bclk ]
set_property IOSTANDARD LVCMOS18 [get_ports I2S_sdin ]
set_property IOSTANDARD LVCMOS18 [get_ports I2S_sdout ]
```

8 Software Design - Vitis

For Vitis project creation, follow instructions from:

Vitis¹⁵

8.1 Application

Template location: "<project folder>\sw_lib\sw_apps\"

8.1.1 zynqmp_fsbl

TE modified 2021.2 FSBL

General:

- Modified Files: xfsbl_main.c, xfsbl_hooks.h/.c, xfsbl_board.h/.c (search for 'TE Mod' on source code)
- Add Files: te_xfsbl_hooks.h/.c (for hooks and board)
- General Changes:
 - Display FSBL Banner and Device Name

Module Specific:

- Add Files: all TE Files start with te_*
- Si5338 Configuration
- OTG+PCIe Reset over MIO
- I2C MUX for EEPROM MAC

8.1.2 zynqmp_fsbl_flash

TE modified 2021.2 FSBL

General:

- Modified Files: xfsbl_initialisation.c, xfsbl_hw.h, xfsbl_handoff.c, xfsbl_main.c
- General Changes:
 - Display FSBL Banner
 - Set FSBL Boot Mode to JTAG
 - Disable Memory initialisation

8.1.3 hello_te0803

Hello TE0803 is a Xilinx Hello World example as endless loop instead of one console output.

8.1.4 u-boot

U-Boot.elf is generated with PetaLinux. Vitis is used to generate Boot.bin.

¹⁵ <https://wiki.trenz-electronic.de/display/PD/Vitis>

9 Software Design - PetaLinux

For PetaLinux installation and project creation, follow instructions from:

- [PetaLinux KICKstart¹⁶](#)

9.1 Config

Start with **petalinux-config** or **petalinux-config --get-hw-description**

Changes:

- adjust Ethernet MAC Address (not necessary with the next version)
 - `CONFIG_SUBSYSTEM_ETHERNET_PSU_ETHERNET_3_MAC=""`
- select SD default instead of eMMC:
 - `CONFIG_SUBSYSTEM_PRIMARY_SD_PSU_SD_1_SELECT=y`
- generate u-boot.dtb:
 - `CONFIG_SUBSYSTEM_UBOOT_EXT_DTB=y`
- add new flash partition for bootscr and sizing
 - `CONFIG_SUBSYSTEM_FLASH_PSU_QSPI_0_BANKLESS_PART0_SIZE=0xA00000`
 - `CONFIG_SUBSYSTEM_FLASH_PSU_QSPI_0_BANKLESS_PART2_SIZE=0x2000000`
 - `CONFIG_SUBSYSTEM_FLASH_PSU_QSPI_0_BANKLESS_PART3_NAME="bootscr"`
 - `CONFIG_SUBSYSTEM_FLASH_PSU_QSPI_0_BANKLESS_PART3_SIZE=0x80000`

9.2 U-Boot

Start with **petalinux-config -c u-boot**

Changes:

- MAC from eeprom together with uboot and device tree settings:
 - `CONFIG_ZYNQ_GEM_I2C_MAC_OFFSET=0xFA`
 - `CONFIG_ENV_OVERWRITE=y`
 - `CONFIG_SYS_I2C_EEPROM_ADDR=0x50`
 - `CONFIG_SYS_I2C_EEPROM_BUS=7`
- Boot Modes:
 - `CONFIG_QSPI_BOOT=y`
 - `CONFIG_SD_BOOT=y`
 - # `CONFIG_ENV_IS_IN_NAND` is not set
 - `CONFIG_BOOT_SCRIPT_OFFSET=0x2A40000`

Change platform-top.h:

```
#no changes
```

¹⁶ <https://wiki.trenz-electronic.de/display/PD/PetaLinux+KICKstart>

9.3 Device Tree

project-spec\meta-user\recipes-bsp\device-tree\files\system-user.dtsi

```
/include/ "system-conf.dtsi"
{
    chosen {
        xlnx,eeprom = &eeprom;
    };
};

/*----- gtr -----*/
//https://xilinx-wiki.atlassian.net/wiki/spaces/A/pages/18841716/
Zynq+Ultrascale+MPSoC+Linux+SI0U+driver

{
    refclk3:psgtr_dp_clock {
        compatible = "fixed-clock";
        #clock-cells = <0x00>;
        clock-frequency = <270000000>;
    };

    refclk2:psgtr_PCIE_usb_clock {
        compatible = "fixed-clock";
        #clock-cells = <0x00>;
        clock-frequency = <1000000000>;
    };

    //refclk1:psgtr_unused_clock {
    //    compatible = "fixed-clock";
    //    #clock-cells = <0x00>;
    //    clock-frequency = <1000000000>;
    //};

    refclk0:psgtr_sata_clock {
        compatible = "fixed-clock";
        #clock-cells = <0x00>;
        clock-frequency = <1500000000>;
    };
};

&psgtr {
    clocks = <&refclk0 &refclk2 &refclk3>;
    /* ref clk instances used per lane */
    clock-names = "ref0\0ref2\0ref3";
};

/*----- SD -----*/
&sdhci0 {
    // disable-wp;
    no-1-8-v;
```

```
};

&sdhci1 {
    // disable-wp;
    no-1-8-v;

};

/*----- USB -----*/
&dwc3_0 {
    status = "okay";
    dr_mode = "host";
    snps,usb3_lpm_capable;
    snps,dis_u3_susphy_quirk;
    snps,dis_u2_susphy_quirk;
    phy-names = "usb2-phy","usb3-phy";
    maximum-speed = "super-speed";
};

/*----- ETH PHY -----*/
&gem3 {
    phy-handle = <&phy0>;
    phy0: phy0@1 {
        device_type = "ethernet-phy";
        reg = <1>;
    };
};

/*----- QSPI -----*/
&qspi {
    #address-cells = <1>;
    #size-cells = <0>;
    status = "okay";
    flash0: flash0@0 {
        compatible = "jedec.spi-nor";
        reg = <0x0>;
        #address-cells = <1>;
        #size-cells = <1>;
    };
};

/*----- I2C -----*/
&i2c0 {
    i2cswitch@73 { // u
        compatible = "nxp,pca9548";
        #address-cells = <1>;
        #size-cells = <0>;
        reg = <0x73>;
        i2c-mux-idle-disconnect;
        i2c@0 { // MCLK TEBF0808 SI5338A, 570FBB000290DG_unassembled
            #address-cells = <1>;
            #size-cells = <0>;
            reg = <0>;
        };
};
```

```
};

i2c@1 { // SFP TEBF0808 PCF8574DWR
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <1>;
};

i2c@2 { // PCIe
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <2>;
};

i2c@3 { // SFP1 TEBF0808
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <3>;
};

i2c@4 { // SFP2 TEBF0808
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <4>;
};

i2c@5 { // TEBF0808 EEPROM
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <5>;
    eeprom: eeprom@50 {
        compatible = "atmel,24c08";
        reg = <0x50>;
    };
};

i2c@6 { // TEBF0808 FMC
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <6>;
};

i2c@7 { // TEBF0808 USB HUB
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <7>;
};

i2cswitch@77 { // u
    compatible = "nxp,pca9548";
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <0x77>;
    i2c-mux-idle-disconnect;
};

i2c@0 { // TEBF0808 PMOD P1
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <0>;
};

i2c@1 { // i2c Audio Codec
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <1>;
};
```

```

/*
adau1761: adau1761@38 {
    compatible = "adi,adau1761";
    reg = <0x38>;
};

};

i2c@0 { // TEBF0808 Firefly A
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <2>;
};

i2c@3 { // TEBF0808 Firefly B
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <3>;
};

i2c@4 { //Module PLL Si5338 or SI5345
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <4>;
};

i2c@5 { //TEBF0808 CPLD
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <5>;
};

i2c@6 { //TEBF0808 Firefly PCF8574DWR
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <6>;
};

i2c@7 { // TEBF0808 PMOD P3
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <7>;
};

};

};

};
```

project-spec\meta-user\recipes-bsp\uboot-device-tree\files\system-user.dtsi

```
/include/ "system-conf.dtsi"
{
    chosen {
        xlnx,eeprom = &eeprom;
    };
};
```

```
/*----- gtr -----*/
//https://xilinx-wiki.atlassian.net/wiki/spaces/A/pages/18841716/
Zynq+Ultrascale+MPSoC+Linux+SI0U+driver

{
    refclk3:psgtr_dp_clock {
        compatible = "fixed-clock";
        #clock-cells = <0x00>;
        clock-frequency = <27000000>;
    };

    refclk2:psgtr_PCIE_usb_clock {
        compatible = "fixed-clock";
        #clock-cells = <0x00>;
        clock-frequency = <100000000>;
    };

    //refclk1:psgtr_unused_clock {
    //    compatible = "fixed-clock";
    //    #clock-cells = <0x00>;
    //    clock-frequency = <100000000>;
    //};

    refclk0:psgtr_sata_clock {
        compatible = "fixed-clock";
        #clock-cells = <0x00>;
        clock-frequency = <150000000>;
    };
};

&psgtr {
    clocks = <&refclk0 &refclk2 &refclk3>;
    /* ref clk instances used per lane */
    clock-names = "ref0\0ref2\0ref3";
};

/*----- SD -----*/
&sdhci0 {
    // disable-wp;
    no-1-8-v;
};

&sdhci1 {
    // disable-wp;
    no-1-8-v;
};

/*----- USB -----*/
&dwc3_0 {
    status = "okay";
    dr_mode = "host";
    snps,usb3_lpm_capable;
    snps,dis_u3_susphy_quirk;
```

```
snps,dis_u2_susphy_quirk;
phy-names = "usb2-phy","usb3-phy";
maximum-speed = "super-speed";
};

/*----- ETH PHY -----*/
&gem3 {
    phy-handle = <&phy0>;
    phy0: phy0@1 {
        device_type = "ethernet-phy";
        reg = <1>;
    };
};

/*----- QSPI -----*/
&qspi {
    #address-cells = <1>;
    #size-cells = <0>;
    status = "okay";
    flash0: flash@0 {
        compatible = "jedec.spi-nor";
        reg = <0x0>;
        #address-cells = <1>;
        #size-cells = <1>;
    };
};

/*----- I2C -----*/
&i2c0 {
    i2cswitch@73 { // u
        compatible = "nxp,pca9548";
        #address-cells = <1>;
        #size-cells = <0>;
        reg = <0x73>;
        i2c-mux-idle-disconnect;
        i2c@0 { // MCLK TEBF0808 SI5338A, 570FBB000290DG_unassembled
            #address-cells = <1>;
            #size-cells = <0>;
            reg = <0>;
        };
        i2c@1 { // SFP TEBF0808 PCF8574DWR
            #address-cells = <1>;
            #size-cells = <0>;
            reg = <1>;
        };
        i2c@2 { // PCIe
            #address-cells = <1>;
            #size-cells = <0>;
            reg = <2>;
        };
        i2c@3 { // SFP1 TEBF0808
            #address-cells = <1>;
            #size-cells = <0>;
            reg = <3>;
        };
};
```

```
i2c@4 { // SFP2 TEBF0808
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <4>;
};

i2c@5 { // TEBF0808 EEPROM
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <5>;
    eeprom: eeprom@50 {
        compatible = "atmel,24c08";
        reg = <0x50>;
    };
};

i2c@6 { // TEBF0808 FMC
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <6>;
};

i2c@7 { // TEBF0808 USB HUB
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <7>;
};

i2cswitch@77 { // u
    compatible = "nxp,pca9548";
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <0x77>;
    i2c-mux-idle-disconnect;
};

i2c@0 { // TEBF0808 PMOD P1
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <0>;
};

i2c@1 { // i2c Audio Codec
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <1>;
    /*
     adaui761: adaui761@38 {
        compatible = "adi,adaui761";
        reg = <0x38>;
    };
    */
};

i2c@2 { // TEBF0808 Firefly A
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <2>;
};

i2c@3 { // TEBF0808 Firefly B
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <3>;
};
```

```

};

i2c@4 { //Module PLL Si5338 or SI5345
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <4>;
};

i2c@5 { //TEBF0808 CPLD
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <5>;
};

i2c@6 { //TEBF0808 Firefly PCF8574DWR
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <6>;
};

i2c@7 { // TEBF0808 PMOD P3
    #address-cells = <1>;
    #size-cells = <0>;
    reg = <7>;
};

};

};

}
;

```

9.4 FSBL patch

Must be add manually, see template

9.5 Kernel

Start with **petalinux-config -c kernel**

Changes:

- Only needed to fix JTAG Debug issue:
 - # CONFIG_CPU_IDLE is not set
 - # CONFIG_CPU_FREQ is not set
 - CONFIG_EDAC_CORTEX_ARM64=y
- Support PCIe memory card
 - CONFIG_NVME_CORE=y
 - CONFIG_BLK_DEV_NVME=y
 - # CONFIG_NVME_MULTIPATH is not set
 - # CONFIG_NVME_HWMON is not set
 - # CONFIG_NVME_TCP is not set
 - CONFIG_NVME_TARGET=y
 - # CONFIG_NVME_TARGET_PASSTHRU is not set
 - # CONFIG_NVME_TARGET_LOOP is not set
 - # CONFIG_NVME_TARGET_FC is not set
 - # CONFIG_NVME_TARGET_TCP is not set
 - CONFIG_SATA_AHCI=y
 - CONFIG_SATA_MOBILE_LPM_POLICY=0

- CONFIG_NVM=y
- CONFIG_NVM_PBLK=y
- CONFIG_NVM_PBLK_DEBUG=y

9.6 Rootfs

Start with **petalinux-config -c rootfs**

Changes:

- For web server app:
 - CONFIG_busybox-httpd=y
- For additional test tools only:
 - CONFIG_i2c-tools=y
 - CONFIG_packagegroup-petalinux-utils=y (util-linux,cpufrequtils,bridge-utils,mtd-utils,usbutils,pciutils,canutils,i2c-tools,smartmontools,e2fsprogs)

9.7 Applications

See "<project folder>\os\petalinux\project-spec\meta-user\recipes-apps\"

9.7.1 startup

Script App to load init.sh from SD Card if available.

9.7.2 webfwu

Webserver application suitable for Zynq access. Need busybox-httpd

10 Additional Software

10.1 SI5338

File location "<project folder>\misc\PLL\Si5338_B\Si5338-*.slabtimeproj"

General documentation how you work with this project will be available on [Si5338](#)¹⁷

¹⁷ <https://wiki.trenz-electronic.de/display/PD/Si5338>

11 Appx. A: Change History and Legal Notices

11.1 Document Change History

To get content of older revision go to "Change History" of this page and select older document revision number.

Date	Document Revision	Authors	Description
📅 2022-10-17	v.36 (see page 6)	@ Manuela Strücker ¹⁸	<ul style="list-style-type: none"> script update
2022-09-06	v.35	Manuela Strücker	<ul style="list-style-type: none"> new assembly variants
2022-07-15	v.33	Manuela Strücker	<ul style="list-style-type: none"> Release 2021.2
2021-09-09	v.29	Manuela Strücker	<ul style="list-style-type: none"> Release 2020.2 update document style
2020-04-06	v.28	John Hartfiel	<ul style="list-style-type: none"> new assembly variants
2020-03-25	v.27	John Hartfiel	<ul style="list-style-type: none"> script update
2020-02-25	v.26	John Hartfiel	<ul style="list-style-type: none"> Update requirement section
2020-01-23	v.25	John Hartfiel	<ul style="list-style-type: none"> Release 2019.2
2019-05-07	v.24	John Hartfiel	<ul style="list-style-type: none"> Release 2018.3
2018-10-26	v.21	John Hartfiel	<ul style="list-style-type: none"> new assembly variant
2018-08-14	v.19	John Hartfiel	<ul style="list-style-type: none"> design update
2018-07-23	v.18	John Hartfiel	<ul style="list-style-type: none"> new assembly variant

¹⁸ <https://wiki.trenz-electronic.de/display/~m.struecker>

Date	Document Revision	Authors	Description
2018-07-20	v.16	John Hartfiel	<ul style="list-style-type: none"> • Release 2018.2
2018-05-17	v.14	John Hartfiel	<ul style="list-style-type: none"> • new assembly variant • solved known issues
2018-04-30	v.13	John Hartfiel	<ul style="list-style-type: none"> • Update known Issues
2018-04-11	v.12	John Hartfiel	<ul style="list-style-type: none"> • bugfix board part files
2018-02-13	v.11	John Hartfiel	<ul style="list-style-type: none"> • new assembly variant • solved known issues
2018-01-29	v.4	John Hartfiel	<ul style="list-style-type: none"> • Update known Issues
2018-01-18	v.3	John Hartfiel	<ul style="list-style-type: none"> • Release 2017.4
	All	@ John Hartfiel ¹⁹ , Manuela Strücker ²⁰	

Table 12: Document change history.

11.2 Legal Notices

11.3 Data Privacy

Please also note our data protection declaration at <https://www.trenz-electronic.de/en/Data-protection-Privacy>

11.4 Document Warranty

The material contained in this document is provided “as is” and is subject to being changed at any time without notice. Trenz Electronic does not warrant the accuracy and completeness of the materials in this document. Further, to the maximum extent permitted by applicable law, Trenz Electronic disclaims all warranties, either express or implied, with regard to this document and any information contained herein, including but not limited to the implied warranties of merchantability, fitness for a particular purpose or non infringement of intellectual property. Trenz Electronic shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein.

¹⁹ <https://wiki.trenz-electronic.de/display/~j.hartfiel>

²⁰ <https://wiki.trenz-electronic.de/display/~m.struecker>

11.5 Limitation of Liability

In no event will Trenz Electronic, its suppliers, or other third parties mentioned in this document be liable for any damages whatsoever (including, without limitation, those resulting from lost profits, lost data or business interruption) arising out of the use, inability to use, or the results of use of this document, any documents linked to this document, or the materials or information contained at any or all such documents. If your use of the materials or information from this document results in the need for servicing, repair or correction of equipment or data, you assume all costs thereof.

11.6 Copyright Notice

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Trenz Electronic.

11.7 Technology Licenses

The hardware / firmware / software described in this document are furnished under a license and may be used / modified / copied only in accordance with the terms of such license.

11.8 Environmental Protection

To confront directly with the responsibility toward the environment, the global community and eventually also oneself. Such a resolution should be integral part not only of everybody's life. Also enterprises shall be conscious of their social responsibility and contribute to the preservation of our common living space. That is why Trenz Electronic invests in the protection of our Environment.

11.9 REACH, RoHS and WEEE

REACH

Trenz Electronic is a manufacturer and a distributor of electronic products. It is therefore a so called downstream user in the sense of REACH²¹. The products we supply to you are solely non-chemical products (goods). Moreover and under normal and reasonably foreseeable circumstances of application, the goods supplied to you shall not release any substance. For that, Trenz Electronic is obliged to neither register nor to provide safety data sheet. According to present knowledge and to best of our knowledge, no SVHC (Substances of Very High Concern) on the Candidate List²² are contained in our products. Furthermore, we will immediately and unsolicited inform our customers in compliance with REACH - Article 33 if any substance present in our goods (above a concentration of 0,1 % weight by weight) will be classified as SVHC by the European Chemicals Agency (ECHA)²³.

RoHS

Trenz Electronic GmbH herewith declares that all its products are developed, manufactured and distributed RoHS compliant.

WEEE

²¹ <http://guidance.echa.europa.eu/>

²² <https://echa.europa.eu/candidate-list-table>

²³ <http://www.echa.europa.eu/>

Information for users within the European Union in accordance with Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003 on waste electrical and electronic equipment (WEEE).

Users of electrical and electronic equipment in private households are required not to dispose of waste electrical and electronic equipment as unsorted municipal waste and to collect such waste electrical and electronic equipment separately. By the 13 August 2005, Member States shall have ensured that systems are set up allowing final holders and distributors to return waste electrical and electronic equipment at least free of charge. Member States shall ensure the availability and accessibility of the necessary collection facilities. Separate collection is the precondition to ensure specific treatment and recycling of waste electrical and electronic equipment and is necessary to achieve the chosen level of protection of human health and the environment in the European Union. Consumers have to actively contribute to the success of such collection and the return of waste electrical and electronic equipment. Presence of hazardous substances in electrical and electronic equipment results in potential effects on the environment and human health. The symbol consisting of the crossed-out wheeled bin indicates separate collection for waste electrical and electronic equipment.

Trenz Electronic is registered under WEEE-Reg.-Nr. DE97922676.

 2019-06-07